


- Versatile mobile terminal powered by Android 13 for all mobile business needs.
- Supported by LANDI's asset management platform, LANDI Connect, to meet the
 evolving demands of today's digital world.
- Integrated printer for ultimate user convenience.



- Compact design for ultimate portability
- Spacious 6.5" touch screen and ergonomic interface
- Powerful processor for smooth operation (Qualcomm Quad-core, 2.0GHz)
- Heavy duty, swappable battery (3500mAh/7.2V)
- Complete connectivity options (2G/3G/4G, Wi-Fi, GPS, Bluetooth 5.0)
- 5MP rear camera for convenient QR code reading.
 Optional front camera

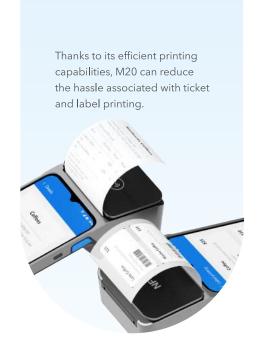

SPECIFICATIONS

Processor	Qualcomm Quad-core, 2.0GHz	Positioning	GPS, GLONASS, BEIDOU
os	Android 13 (GMS Certified)	Camera	Front camera: optional, 2M pixels, fixed focus camera, for code scanning Rear camera: 5M pixels, autofocus and flashlight
Memory	3GB RAM+32GB FLASH 4GB RAM+64GB FLASH (Optional) 2GB RAM + 16GB FLASH (Optional, No GMS) Micro SD Card (Up to 2TB)		
		NFC	Android NFC, ISO/IEC 14443, ISO15693 compliant, support Type A/B, Mifare, Felica
Display & Touchscreen	6.5", IPS, 720x1600 HD capacitive multi-touch	SIM/SAM Slots	· 2 SIM + 2 SAM
Printer	· 58mm Thermal Printer; Diameter: 40mm; Print speed: 80mm/s; · Support label printing (Optional); Label paper specs: 30-58mm wide, ≥20mm high, 2mm wide gap	Connection	· 1 USB Type-C · 2 PIN Pogo Pin
		Sensor	· G-sensor, support screen rotation automatic · Light Sensor
Scanner	Option 1: NoneOption 2: LANDI Scan EngineOption 3: Honeywell Scan Engine**	PSU	5V/2A
		Battery	3500mAh/7.2V, removable
Buttons	1 power key (Right side) 2 scan code keys are located on each side (Optional)	Size	L-23.5cm W-8cm H-5.3cm 9.25" x 3.15" x 2.09"
Audio	2 volume keys (Left side) Speaker: 1W 90dB@0.1m Headset: USB Type-C	Accessories (Optional)	Terminal charging base;Battery charger (Support 4 batteries)Hand strap
Connectivity	MIC: Dual MIC Cellular: 4G fallback 3G and GPRS, Global band Wi-Fi: IEEE 802.11 a/b/g/n/ac 2.4G and 5G Bluetooth: Bluetooth 5.0, support BLE	Environment	Operating temperature: -10°C to +50°C Storage temperature: -20°C to +55°C Operating humidity: 10% to 90% non- condensing
Protection	1.2m drop tested *Data from LANDI lab	Certifications	CE/CB/FCC/IC/RoHS/WEEE/ GMS**

 $^{^{\}star}$ When MicroSD card is inserted. Card slot is 1 SIM + 1 MicroSD + 2 SAM.





^{**} Option not available on 2GB + 16GB memory.