

- 11.6" IPS Capacitive Touch .
- OS : Windows 10 pro / Android 7.1 /8.1.
- 80mm Receipt thermal printer -Autocutter.
(Support Thermal Label / Thermal Receipt)
- Optional : 1D/2D barcode scanner / PSAM /
NFC / RFID / VFD / Battery/
4.3" LCD Display



Barcode Scanner



NFC



80mm Printer



4.3" Display



PSAM Card




RFID



80mm SEIKO Printer (AutoCutter)

Support: Label / Receipt
Printer Speed : 200mm/S

Laber Printer



Thermal Printer

House Blend, Flavored, Mike's Blend, Decaf			
For Here:	Large \$2.50	Medium \$2.00	Small \$1.50
To Go:	Large \$2.50	Medium \$2.00	Small \$1.50
Americano	12oz \$2.50	16oz \$2.75	
Red Eye	12oz \$2.50	16oz \$3.00	
Cafe Au Lait	12oz \$2.50	16oz \$2.75	
Espresso	Shot \$2.00	DL \$2.75	
Cappuccino	12oz \$2.50	DL \$3.25	
Latte	12oz \$3.25	DL \$3.75	
Mocha	12oz \$3.50	DL \$4.25	
Xtra Whipcream	\$0.75	Hot Tea \$2.50	
Xtra Espresso Shot	\$0.75	Thai Iced Tea \$3.00	
Xtra Flavored Syrup	\$0.75	Iced Tea \$2.50	
Big Bear Soda	\$0.75		
*Soymlk is available on request			
10 cents off in your own cup 16oz or less			
Chai Tea & Thai Latte	12oz \$3.75	16oz \$4.25	
(Dove or Vanilla)			
Iced Coffee	\$2.50		
Blended Iced Coffees	\$4.25		
Italian Sodas	\$3.25		




1D/2D Barcode Scanner :



Multiple payment modes:

NFC/RFID/1D 2D barcode scanner

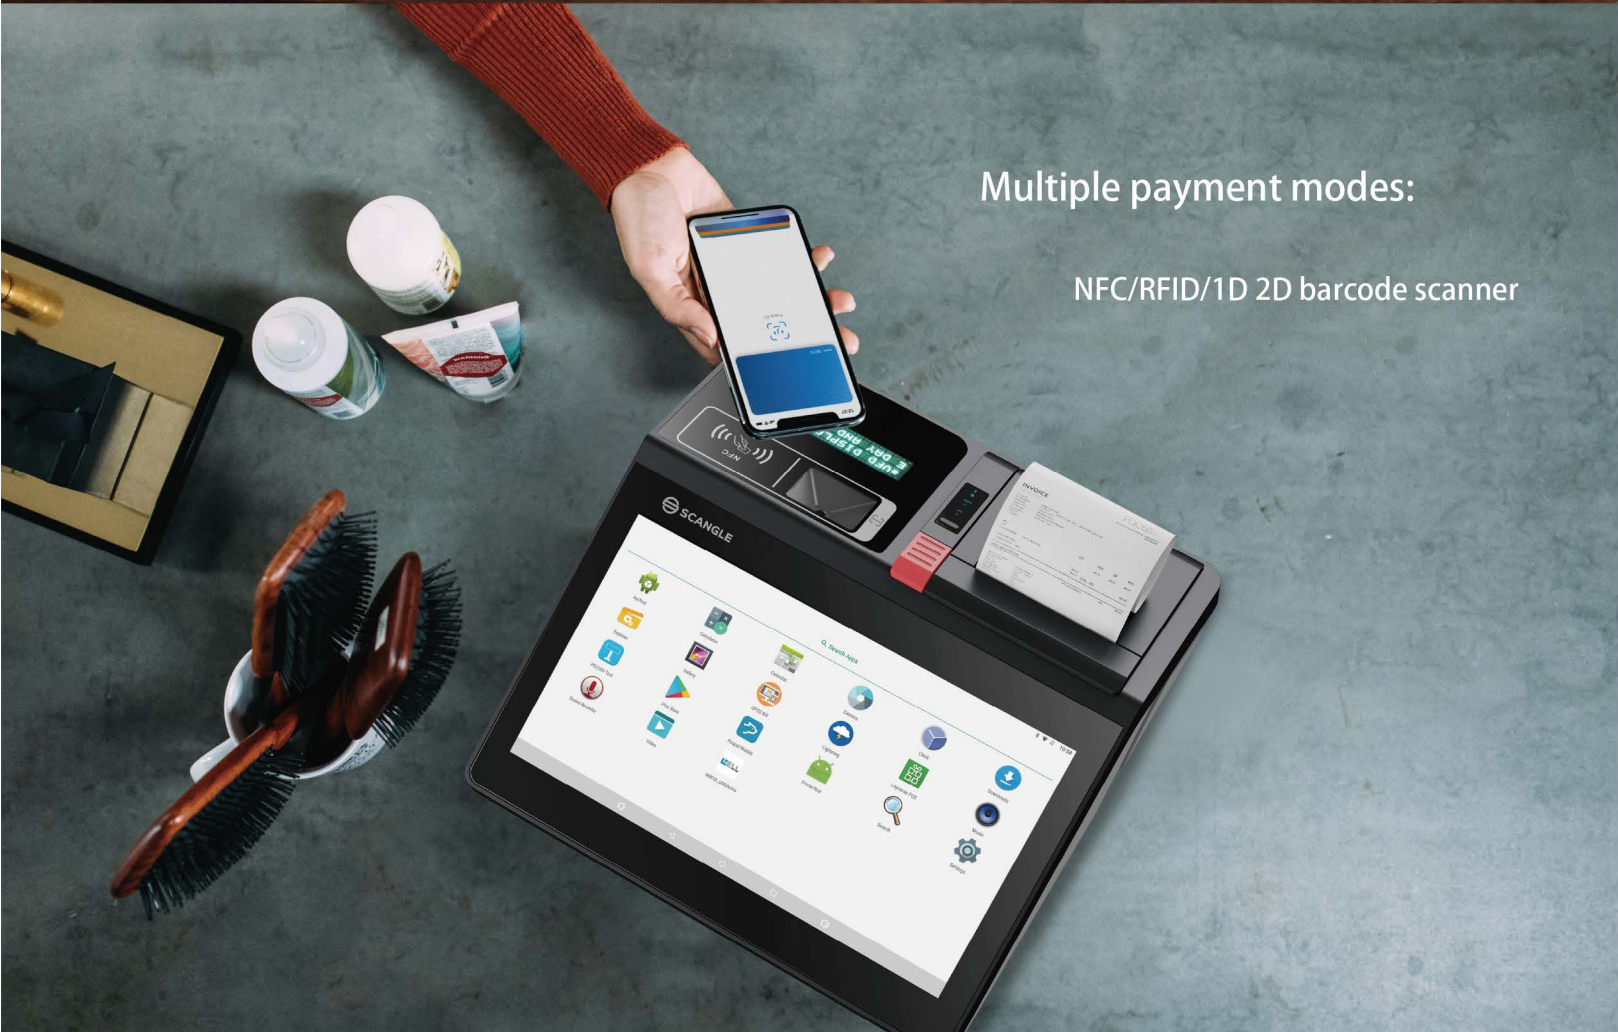

11.6" IPS Display

(1366*768 pixel or 1920*1080 pixel)



Thermal Sticker

Display 11.6" IPS 1366*768 or 1920*1080 Pixel Second Display: 4.3" LCD 800*480 (Optional)	OS Windows: Win10 pro system Android: Android 7.1	CPU Windows: J1900/3/15/17 Android: RK3288	Memory Windows: RAM:2/4/8GB Android: RAM:2/4/8GB	SSD Windows: RAM:64/128/265/512GB Android: RAM:8/16/32GB
Printer 80mm Receipt Printer Auto Cutter Printer Speed:160mm/s Printer Paper:80*60mm	Wi-Fi 2.4G/5G IEEE 802.11 a/b/g/n support (Optional)	PSAM Card Supprt Mini SIM(2FF)	Battery 10000mAh (Optional)	Barcode Scanner Support 1D/2D (Optional)
Communication 3G/4G(Optional)	Bluetooth Bluetooth 2.4G Printer Bluetooth (Optional)	NFC PBOC 3.0 ISO/ICE 14443 Type A&B&M (Optional)	Speaker 0.8W (Optional)	Camera 5.0MP, AF support 1D/2D (Optional)
Interface USB*4,RS232*1,RJ45*1 VGA*1,RJ11*1,DC*1	Physical Size 206.3*81*54.3mm	Weight Main frame weight: 2kg	Environmental Operating temperature -20-50 C Storage temperature -30-70 C	Power Adaptor Input:100-240V/2.5A 50/60Hz Output: 12V 7A

INDUSTRIAL APPLICATIONS

